

## DE35 Tweeters

50 W continuous program power capacity  
 3500 - 18000 Hz response  
 108 dB sensitivity  
 Neodymium magnet assembly


### Specification

Nominal Impedance	8 ohm
Minimum Impedance	7 ohm
Continuous Power Handling	50 W
Nominal Power Handling (AES)	25 W
Sensitivity (1W/1m)	108 dB
Frequency Range	3.5 - 18 Hz
Recommended Crossover	5 kHz
Voice Coil Diameter	32 mm (1.25 in)
Winding Material	Aluminium
Inductance	0.1 mH
Diaphragm material	Mylar
Flux Density	1.3 T
Magnet Material	Neodymium Inside Slug

### Mounting & Shipping

Shipping Weight	6.1 kg (13.4 lb)
Shipping Box	220x220x150 mm (8.7x8.7x5.9 in)

Replacement Diaphragm	MMD0358
-----------------------	---------

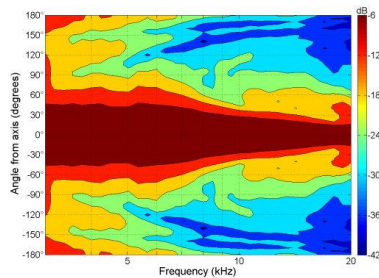

### Mounting & Shipping

Overall Diameter	100 mm (4 in)
Depth	46 mm (1.8 in)
Net Weight	0.7 kg (1.5 lb)